



Product Features:

- Durable Solid-Brass Construction
- Wide-Spread 3-Hole Sink Configuration and Two Lever Handle
- Includes Pop-Up Drain and Rod Adjustment
- 3-Year Manufacturer Warranty

3-Hole, 2-Handle Widespread Bathroom Faucet

Models: (WS3H03-ORB) Trinity, (WS3H03-BN) Fawn, (WS3H15-ORB) Gale, (WS3H05-ORB) Yukon, (WS3H15-BN) Poni, (WS3H05-BN) Emory



For easy installation of your Dyconn Faucet please do the following:

- Thoroughly **read all** instructions before installing the enclosed faucet.
- **Read and understand** all warnings, care and maintenance information.

Product Dimensions

Product dimensions for model: (WS3H05-ORB) Yukon - Modern Oil-Rubbed Bronze Bathroom Faucet



Product dimensions for model: (WS3H15-BN) Poni - Modern Brushed Nickel Bathroom Faucet




Product Dimensions

Product dimensions for model: (WS3H03-ORB) Trinity - Modern Oil-Rubbed Bronze Bathroom Faucet



Faucet Installation


Diagram 1

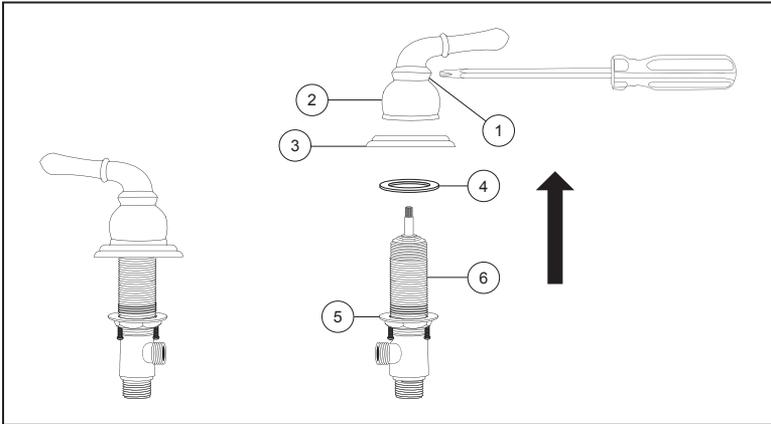

Step 1: Shut off water supply. Remove old faucet.

Step 2: Remove screws (1) on handles (2), pull off the faucet handle, then unscrew the handle base (3) and set all aside, including the gasket (4). Leave the mounting nut (5) on faucet handle shank (6), but screw it all the way to the bottom.

You may need the following tools/materials



Valve Hoses
(not included)



Pliers



Screw Driver



Silicone




Wrench



Plumbers Tape

Diagram 2

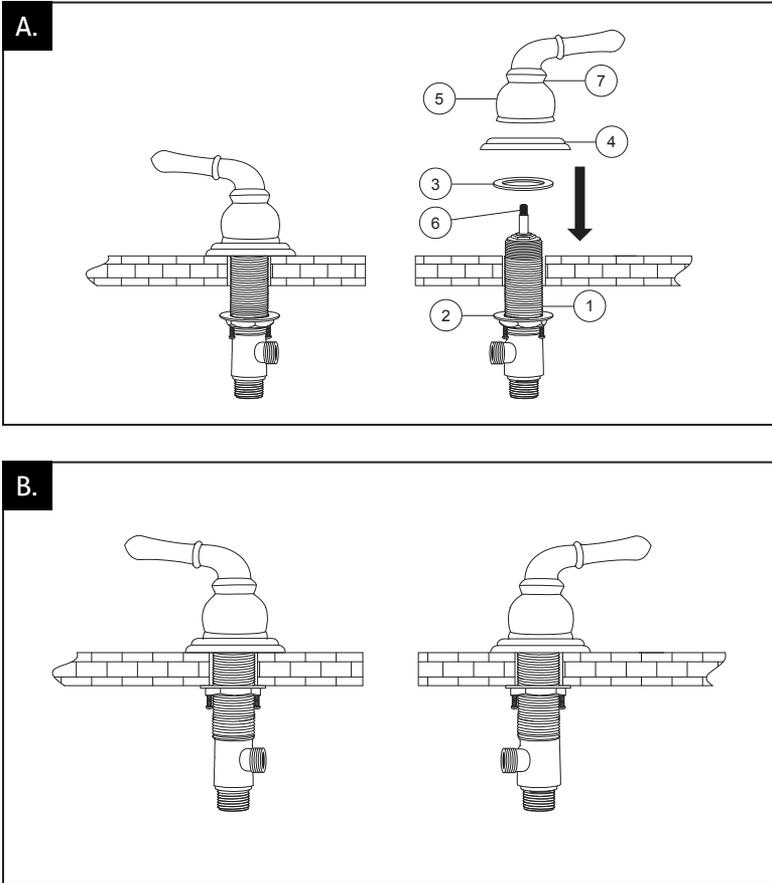


Step 3: A. Insert the faucet handle shank (1) with mounting nut (2) through the deck handle mounting hole from underneath the sink. Apply gasket (3) onto the top of the shank and screw on the faucet handle base (4), then reattach handle (5) onto valve connector (6). Screw handle base (4) until it connects with faucet handle (5) on the shank.

B. Do not over tighten the handle base to the faucet handle, as it will prevent the handle from turning smoothly. Test the handle to ensure it can easily turn on and off. Ensure the handle shank is facing the right direction (as indicated in the Diagram 2B) and that the handle can rotate 90 degrees.

Note: The handles should rotate 90 degrees toward the front, not the back. Finally, tighten the mounting nut (2) until it can no longer tighten and replace the screw (7) onto the faucet handle. Repeat steps for second handle. The completed faucet handles assembly is represented in Diagram 2B.


Diagram 3

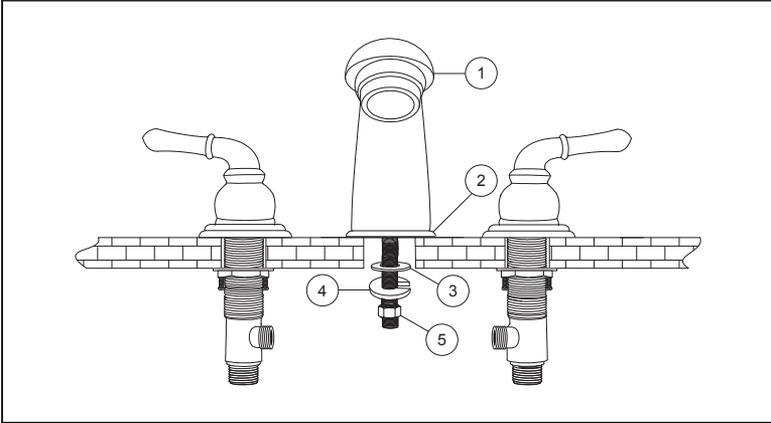

Step 4: Place faucet spout (1) with base (2) and gasket (3) through the top of the sink mounting hole. Secure the spout with washer (4) and nut (5).

Note: If sink is uneven, use silicone under the gasket.


Diagram 4

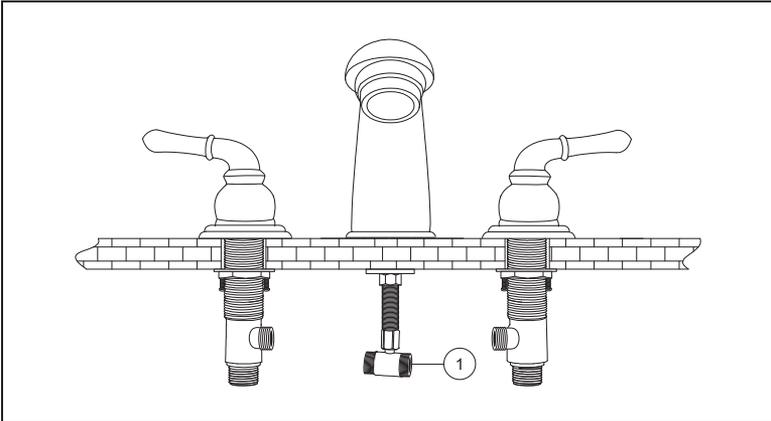

Step 5: Install splitter (1) onto the faucet spout shank.

Note: You might want to consider using plumbers tape for added protection against leakage. Ensure the splitter is securely tightened and that the splitter openings are facing left and right.


Diagram 5

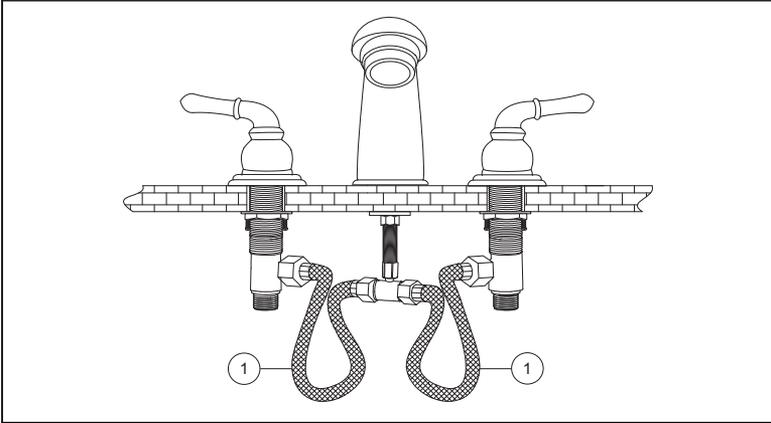

Step 6: Install hoses (1) from each handle shank onto the spout splitter.

Note: It is advisable to consider using plumbers tape for added protection against leakage.


Diagram 6

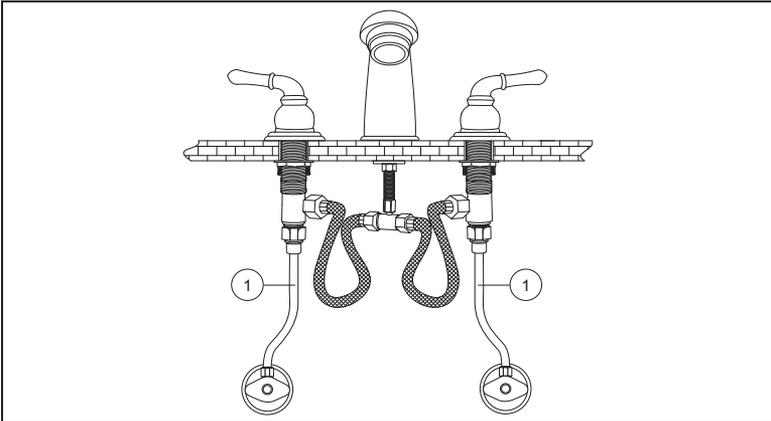

Step 7: Connect valve hoses (1) (not included; sold separately) from your water supply valves onto the bottom of each handle shank. Connect the hot water valve to the left handle shank and the cold water valve to the right handle shank.


Pop-Up Installation

Diagram 1

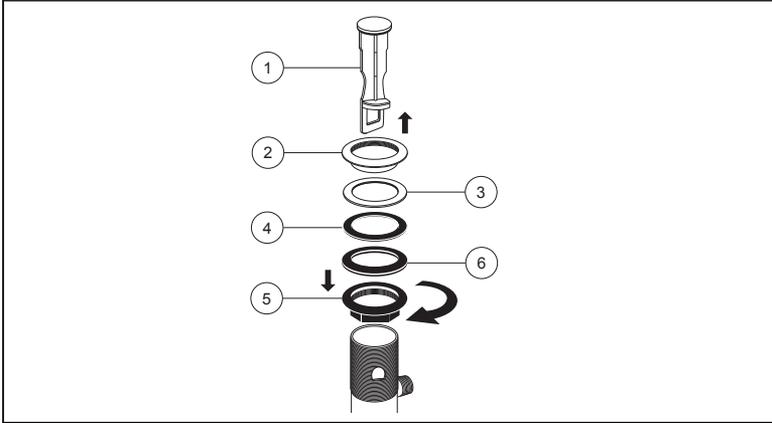


Step 1: Remove stopper (1) and flange (2) with plastic washer (3) and gasket (4). Screw nut (5) all the way down. Push the black gasket (6) down.

Diagram 2

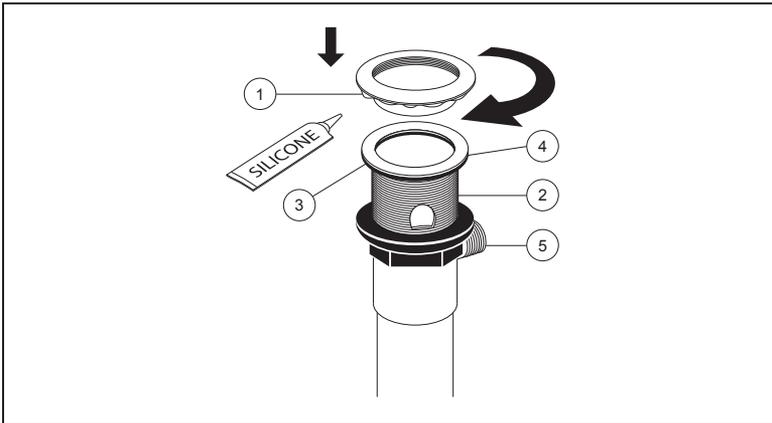


Step 2: Apply silicone to underside of the flange (1). Insert body (2) into sink. Add gasket (3) and add washer (4). Screw flange onto body. Pivot hole (5) must face back of sink. Tighten nut/gasket, clean excess silicone.

Diagram 3

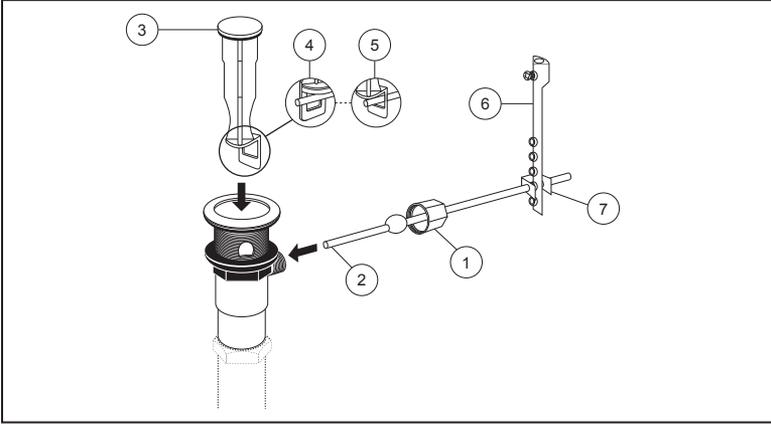

Step 3: Remove pivot nut (1). Install horizontal rod (2) and stopper (3) as removable (4) or non-removable (5). Hand tighten pivot nut (1). Attach horizontal rod to strap (6) using clip (7).

Diagram 4

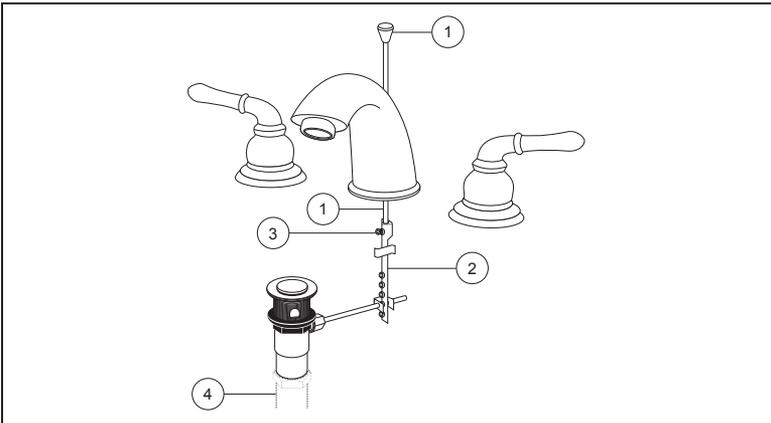

Step 4: Insert lift rod (1) through faucet and into strap (2). Tighten screw (3). Connect assembly to drain (4).

Manufacturer Limited Warranty

All Dyconn Faucet products are manufactured and tested with the highest quality standards and rigorous quality control process. This warranty is limited to the non-commercial use of Dyconn Faucet products purchased and installed in the United States and Canada.

Dyconn Faucet Brand Limited Warranty on Faucets and Kitchen/Bath Accessories

Dyconn Faucet warrants its faucet products to be free from manufacturing defects in material and workmanship during the normal non-commercial use for a period of three (3) years from the initial purchase date by the original owner/end-user for personal household use. Dyconn Faucet also warrants its part and accessory products to be free from manufacturing defects in material and workmanship during the normal non-commercial use for a period of one (1) year from the initial purchase date by the original owner/end-user for personal household use. This warranty is non-transferable between homes or owners and only applicable for residential use. Any commercial or industrial use of Dyconn Faucet products automatically voids the warranty. Any warranty claim must include the original sales receipt as proof of purchase from an Authorized Dealer or Distributor of Dyconn Faucet products. (Authorized Dealers can be found on the Dyconn Faucet website).

Dyconn Faucet recommends installation of all Dyconn Faucet products by a licensed professional plumber. Dyconn Faucet will not be responsible for any damage or product failure due to improper installation, misuse or the failure to adequately utilize a licensed professional. Proper care and maintenance for all products is standard, like any other household appliance and fixtures to ensure proper function and a lasting product. Instructions are provided in your manual on proper care and maintenance of Dyconn Faucet products.

This warranty will not cover any damages that might be caused by the product. (In some instances States do not allow for such limitations, so this may not apply to all owners).

Any product reported to Dyconn Faucet as defective will be repaired or replaced (with a product of equal value) at the option of Dyconn Faucet. If Dyconn Faucet is not able to replace or repair the product, Dyconn Faucet may elect to refund the original purchase price to the original purchaser in exchange for the return of product. Dyconn Faucet has the full rights to inspect any Dyconn Faucet product reported as defective prior to repair or replacement. Any repair and replacement costs EXCLUDE shipping, labor for removal or re-installation and any consequential or special damages associated with return, replacement and installation of your product. Replacement parts may be obtained by calling **1-855-239-2666** (in the U.S. and Canada), by emailing us at info@dyconnfaucet.com or writing to:

Dyconn Faucet
382 N. Lemon Avenue #122
Walnut, CA 91789

Dyconn Faucet reserves the rights to modify the warranty at any time, it being understood that any such modifications will not supersede warranty conditions that are applicable at the time of the original sale of products in question.

Though Dyconn Faucet products are certified by various agencies, Dyconn Faucet makes no implication that products comply with any or all local building or plumbing codes. It is the consumer's responsibility to determine any code compliances when installing and using Dyconn Faucet products.

Limitations of Warranty:

The warranty shall be not apply and be void for incorrect operating procedures, breakages and/or damages caused by fault through improper installation, carelessness, abuse, misuse, misapplication, improper maintenance and alteration of product; damages caused by chemicals, natural corrosion, accident, fire, flood, an act of God, or any casualty. Avoid abrasive cleaners, materials, steel wools and harsh chemicals as these will scratch, damage, and/or dull the products and/or finish of the products and void the warranty. The proper installation of product covered is the responsibility of the original owner/purchaser of the product. Dyconn Faucet neither installs nor supervises the installation nor hires contractors for this purpose; consequently Dyconn Faucet cannot be held responsible for any default breakage, or damages caused thereby or resulting thereof, either directly or indirectly.

This warranty does not apply to Products that have not been installed or operated in accordance with instructions supplied by Dyconn Faucet and all applicable rules, regulations, and legislation pertaining to such installations.

This warranty does not apply to Commercial or Industrial applications of Dyconn Faucet products.

Dyconn Faucet is not responsible or liable for personal injuries or deaths to any person for any direct, special, incidental, or consequential damage, loss of time, loss of profits, inconvenience, incidental expenses, labor or material charges, or any other cost resulting from the use of the product or equipment or pertaining to the application of the present warranty, or resulting from the removal or replacement of any product or element or part covered by this warranty.

In any case, Dyconn Faucet is not liable for any amount over and above the purchase price paid for the Product by the original owner/end-user.

Cleaning and Care

Care should be exercised when cleaning this product. Although its finish is extremely durable, it can be damaged by harsh abrasives and cleaning pads. To clean, use a light, non-abrasive cleaning solution or cleaning polish.