

**PENDANT FIXTURE
INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Connect the Pipe(1),(2),(3) with nipple (2),(3) together with the fixture. Then screw the Nipple(1) with the Socket to the pipe (1).
2. Attach two Screws outward through the CROSS BAR, then attach the CROSS BAR to the OUTLET BOX by the two MOUNTING SCREWS.
3. Make wire connections:
 - Ribbed wire(w/o marking) from light to WHITE WIRE(2) from power source.
 - Smooth wire(w/ marking) from light to BLACK WIRE(3) from power source.
 - Loop the GROUND WIRE(4) to CROSS BAR(6) with a GREEN SCREW(11).
4. Place the CANOPY against the OUTLET BOX by screwing the Ball Nut
5. Attach the GLASS SHADE onto the SOCKET , screwed the SOCKET RING .

INSTALLATION IS NOW COMPLETED

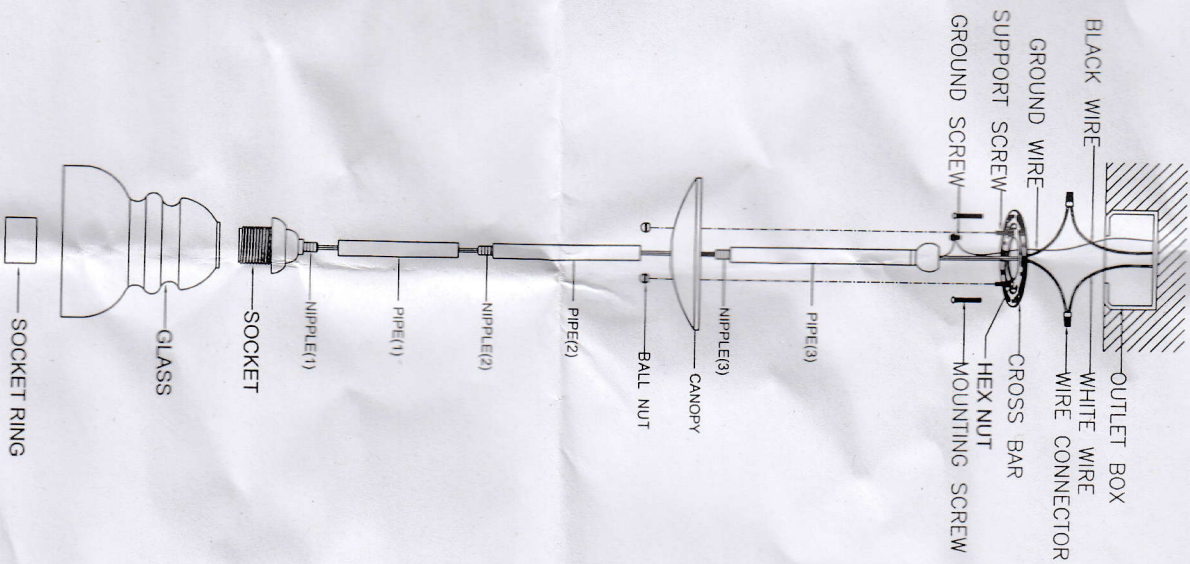

ITEM NO. 7341CH, 7341SN