TOTO®

INSTALLING / CHANGING THE PUSH BUTTON

ENGLISH

Adjusting the Push Button Rods

After making sure the push buttons are installed correctly (see Fig. 1), place the lid on the tank.

If the button(s) is too low (see Fig. 2):

1) Loosen the lock nut/s counterclockwise.
2) Turn the rod(s) counterclockwise to lengthen (each full turn is 1mm).
3) Place the lid on the tank to check the buttons.

If rod(s) is too long, water will keep running in the toilet.

1) Loosen the lock nut(s) counterclockwise.
2) Turn the rod(s) clockwise to shorten them.

Adjust the rods as necessary by turning the rod 1 full turn (see Fig. 3); to lengthen, turn the rod counterclockwise; to shorten, turn the rod clockwise.
When the adjustment is completed, tighten the lock nut to secure it.

After Installation/Adjustment

Flush the toilet two to three times to confirm there is no water leakage and that the push mechanism is working properly.

Fig. 1

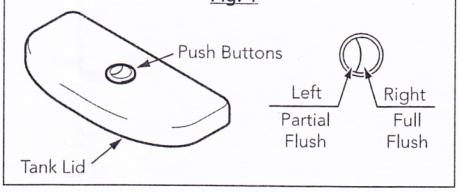

Parts



Fig. 2

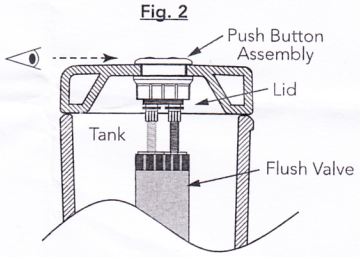

The rod(s) is too short, the buttons are lowered.

Fig. 3



Buttons are at the correct level.

TOTO® U.S.A., Inc. 1155 Southern Road, Morrow, GA 30260 Tel: 888-295-8134 Fax: 800-699-4889 www.totousa.com

0GU063
Rev Date: 10/10