

Features

- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- Two function sprayhead with touch control: Sweep™ spray and aerated stream settings.
- DockNetik™ ensures a secure sprayhead fit.
- Dishwasher safe, removable white, black and taupe silicone handles.
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use.
- Includes 10-1/2" (267 mm) escutcheon plate and 16 ounce (473 ml) refillable soap dispenser.
- 1.8 gal/min (6.8 l/min) maximum flow rate at 60 psi (413.7 kPa)

Material

- Metal construction.

Installation

- Single-, two-, three-, or four-hole installation.
- Left- or right- handle installation and 360° spout rotation.
- Includes flexible supply lines for easy installation.

Water Conservation & Rebates

- Meets CalGreen requirements for kitchen faucets.



ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

■ VS Vibrant® Stainless

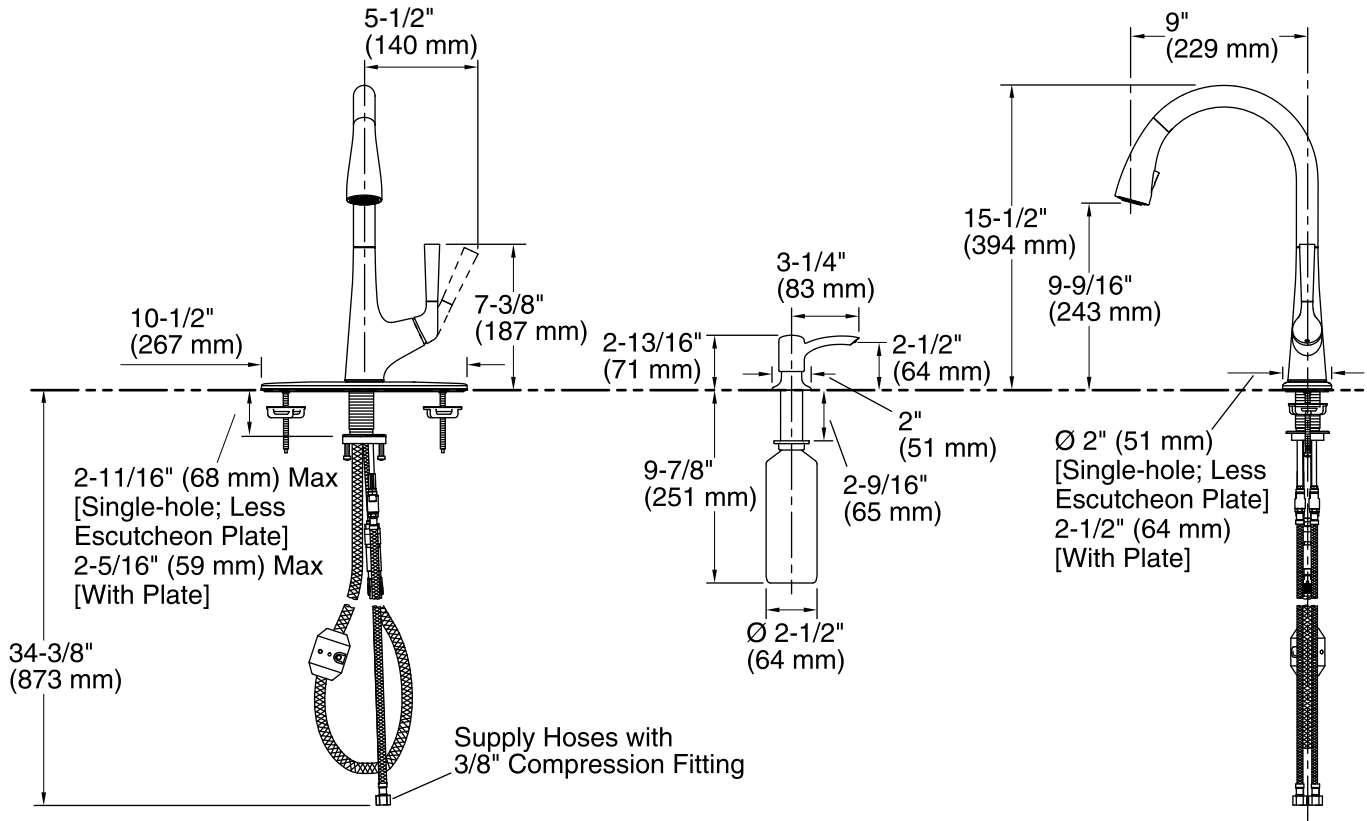

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 9" (229 mm)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.